


---

# Specification

Architecture lighting integration series




LG8513



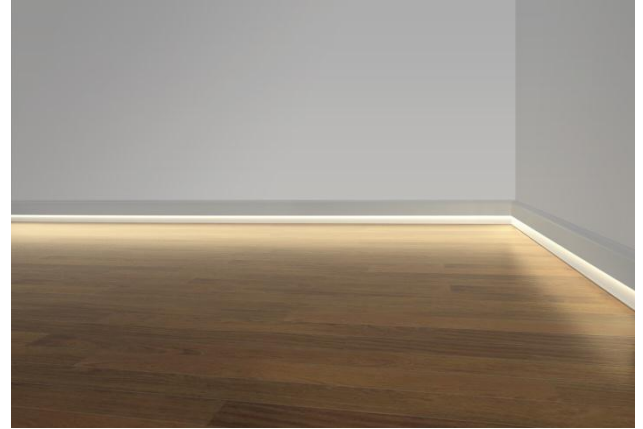



## Features

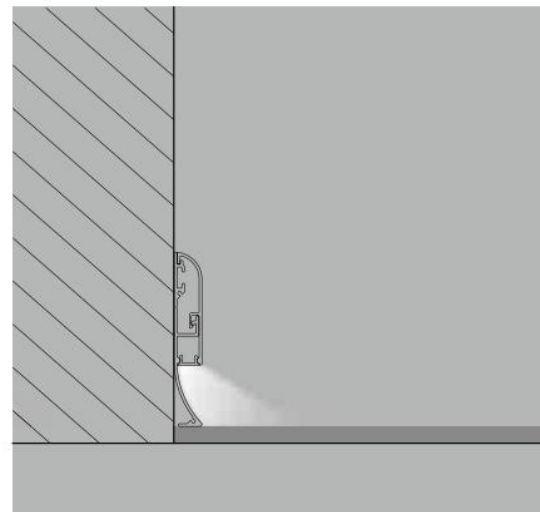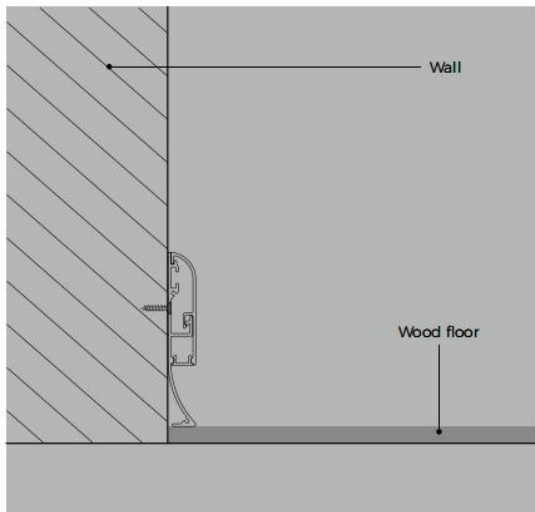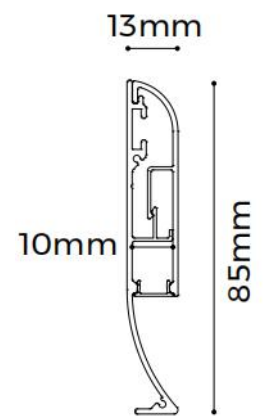


- Applied to skirting board , integrated with architecture
- Indirect lighting to provide decorative lighting effects without necessarily seeing the light
- High-quality surface treatment and three optional colors of white and silver
- AL6063-T5 aluminum profile with excellent heat dissipation performance
- Easy installation and free connection



## Standard Configuration



Picture	Item	Parameter
	Profile	Profile weight : 1.9g/2.5m Size : L2500*W13*H85mm Material : AL6063-T5 Surface processing : Anodizing
	Diffuser	Type: Frosted diffuser Material : PC Light transmittance : 70% Size : L2500*W10*H4.1mm PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.

## Optional Accessories


Picture	Item	Parameter
	Flexible strip D8120-24V-8mm	Material :FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80/>95 ;Voltage :24V ;Power :13.5W/m ;Lumen :1499Lm/m ; Width : 8mm ; Minimum cutting unit : 6LEDs/50mm ;
	Flexible strip D6120-24V-8mm	Material :FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80/>95 ;Voltage :24V ;Power :8.6W/m ;Lumen :710Lm/m ; Width : 8mm ; Minimum cutting unit : 6LEDs/50mm ;
	End caps	Size : L70*W42*H2mm
	Screw	Size : M3.5*40mm

## Optical Parameter

D6120-24V-8mm light source

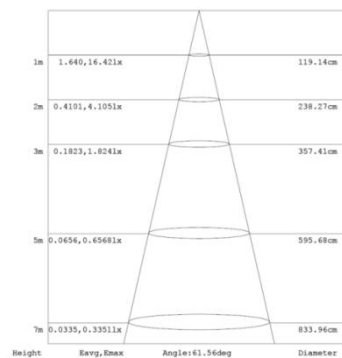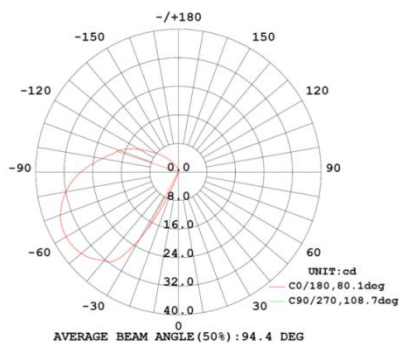

## Package

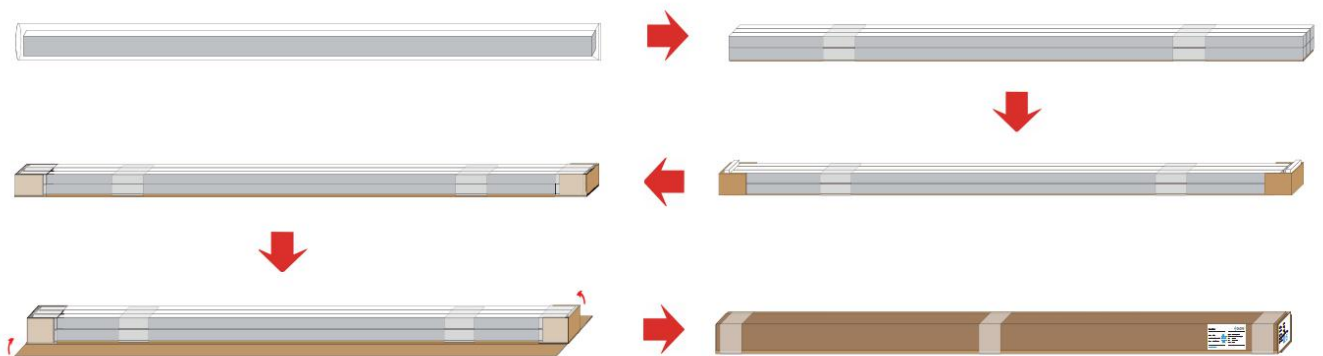

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile	Packing box	2580*125*85mm	7.29	10.29	4pcs/box